



Pressure transmitter



**Pressure range**  
**0 ... 6 – 60 bar**

# Huba Control

## Relative and absolute pressure transmitter for mobile application Type 558

The pressure transmitter type 558 meets the highest requirements for the industry and vehicle manufacturing. This sensor is available with protection standard IP67 or IP69K. The optional pressure orifice prevents damage due to pressure peaks.

The compact and rugged design meets the requirement of shock- and vibration stability according road vehicle standards ISO 16750. The pressure transmitter type 558 guarantees highest EMC stability according to various road vehicle regulations with test level up to 100V.

This sensor utilises a ceramic technology, developed by Huba Control and for the last 20 years, in millions of applications.

- + Compact and rugged construction for high operating reliability
- + Wide choice of connections available
- + Excellent EMC capacity
- + Negligible temperature influence on accuracy

## Technical Overview

### Pressure range

Relative	0 ... 16 – 60 bar
Absolute	0 ... 6 bar

### Operating conditions

Medium		Liquids and gases
Temperature	Medium	FPM -40 ... +125 °C
		EPDM -40 ... +125 °C
	Ambient	NBR -20 ... +100 °C
	Storage	-40 ... +100 °C
Tolerable overload / Rupture pressure		-50 ... +100 °C
		3 x FS

### Materials

Pressure connection		Stainless steel 1.4404 / AISI 316L
Plug accommodation		Polyarylamide 50% GF UL 94 V-0
Materials in contact with the medium	Pressure connection	Stainless steel 1.4404 / AISI 316L
	Sensor	Ceramic Al <sub>2</sub> O <sub>3</sub> (96%)
	Sealing material	EPDM, NBR, FPM

### Electrical overview

	Output	Power supply	Load	Current consumption
2 wire	4 ... 20 mA	7.5 ... 33 VDC	< $\frac{\text{supply voltage} - 7.5V}{0.02A}$ [Ohm]	< 23 mA
3 wire	0 ... 5 V	7 ... 33 VDC	>10 kOhm / < 100 nF	< 7 mA
	0 ... 10 V	12 ... 33 VDC	>10 kOhm / < 100 nF	< 7 mA
	ration. 10 ... 90%	5 VDC ± 10%	>10 kOhm / < 100 nF	< 7 mA
Polarity reversal protection	Short circuit proof and protected against polarity reversal. Each connection is protected against crossover up to max. supply voltage.			
Insulation voltage	500 VDC			

### Dynamic response

Response time	< 2 ms (10 ... 90%, typ. 1 ms)
Load cycle	< 100 Hz

### Electrical connection <sup>1)</sup>

Electrical connection <sup>1)</sup>	Protection standard	Protection class
Kostal SLK 2.8 Codierung A	IP 69K	III
AMP-JPT	IP 67	III
AMP Superseal 1.5	IP 67	III
Deutsch DT04-3P	IP 69K	III
Deutsch DT04-4P	IP 69K	III
Metri Pack 150 P2S Series	IP 67	III
M12x1	IP 69K	III

### Pressure connection

Outside thread	$\frac{7}{16}$ - 20 UNF	sealing cone 45°
	$\frac{7}{16}$ - 20 UNF	sealed at back (SAE J514, ISO 11926-3), SAE-4 ORB with O-ring FPM (-20 ... +135 °C)
	$\frac{9}{16}$ - 18 UNF	sealed at back (SAE J514, ISO 11926-3), SAE-6 ORB with O-ring FPM (-20 ... +135 °C)
	$\frac{1}{4}$ - 18 NPT	
	G $\frac{1}{4}$	sealed at back DIN EN ISO 1179-2 with profile seal FPM (-30 ... +135 °C)
	G $\frac{1}{8}$	sealed at back DIN EN ISO 1179-2 with profile seal FPM (-30 ... +135 °C)
	M14x1.5	sealed at back DIN EN ISO 1179-2 with profile seal FPM (-30 ... +135 °C)
	R $\frac{1}{4}$	acc. EN 10226

### Installation arrangement

Unrestricted

### Tests / Admissions

	Noise immunity / Noise emission	Noise immunity automotive guideline
Electromagnetic compatibility	ISO 13766 - earth-moving equipment	ISO 11452-2, HF (Field), 100 V/m (200 ... 2000 MHz)
	DIN EN 13309 - construction equipment	ISO 11452-4, HF (BCI), 100 mA (20 ... 400 MHz)
	DIN ISO 14982 - agriculture and forestry	ISO 10605, ESD, ±15 kV contact, ±15 kV air
	Automotive guideline ECE R10 <sup>2)</sup>	ISO 7637-2 <sup>3)</sup> , puls 1, 2a, 2b, 3a, 3b (test level 4)
	Automotive guideline 2004/104/EG <sup>2)</sup>	ISO 16750-2, Load Dump, 155 V (1 Ω, 300 ms)
	EN 61326-2-3 - pressure transducer <sup>4)</sup>	
	EN 12895:2015 - industrial trucks	
Shock acc. ISO 16750-3	CISPR11	
Vibration acc. ISO 16750-3	50 g, 11 ms, half sine wave, 1000x / axis	
UL	Test VI (12 g, sinusoidal 18 g random vibration)	
	ANSI/UL 61010-1 acc. E325110	

### Weight

~ 90 g

### Packaging (Please state on order)

Single packaging in cardboard	accessories integrated
Multiple packaging in cardboard (25 pcs)	

## Accuracy

Parameter	Unit	Test conditions:	25 °C, 45% rF
Characteristic line acc. IEC 61298-2 <sup>5)</sup>	% fs		± 0.5
Resolution	% fs		0.1
Thermal characteristic <sup>7)</sup>	max. % fs/10K		± 0.2
Long term stability acc. IEC 61298-2	max. % fs		± 0.3

<sup>1)</sup> Warranty of IP protection only with suitable classified plug (consider manufacturers' instructions)

<sup>3)</sup> Pressure sensor for 12 V and 24 V power system (0 ... 5 V, 0 ... 10 V and 4 ... 20 mA)

<sup>5)</sup> incl. zero point, full scale, linearity, hysteresis and repeatability

<sup>2)</sup> E1 approval for customer specific type on request

<sup>4)</sup> types M12x1 only

<sup>6)</sup> Considering EMC interference < ±1.5% fs

<sup>7)</sup> -40 ... +100 °C

		1	2	3	4	5	6	7	8	9	10	11
<b>Order code selection table in bar</b>		<b>558. X X X X X X X X X X X X</b>										
<b>Pressure mode</b>	Relative	9										
	Absolute	8										
<b>Pressure range <sup>1)</sup></b>	0 ... 6 bar	8	1	7								
	0 ... 16 bar	9	3	1								
	0 ... 25 bar	9	3	2								
	0 ... 40 bar	9	3	3								
	0 ... 60 bar	9	4	0								
<b>Sealing material</b>	EPDM Ethylene propylene				1	0						
	NBR Butadiene Acrylonitrile				2	0						
	FPM Fluoro elastomer				5	0						
<b>Output / Power supply</b>	0 ... 5 V 7 ... 33 VDC						1					
	0 ... 10 V 12 ... 33 VDC						2					
	4 ... 20 mA 7.5 ... 33 VDC						3					
	ratiom. 10 ... 90% 5 VDC ±10%						7					
<b>Electrical connection <sup>2)</sup></b>	Kostal SLK 2.8 coding A						7	1				
	AMP-JPT							2				
	AMP Superseal 1.5							3				
	Deutsch DT04-3P 2w: IN=1 / OUT=3 3w: IN=A / OUT=C / GND=B							4				
	Deutsch DT04-3P 3w: IN=A / OUT=B / GND=C							G				
	Deutsch DT04-4P 3w: IN=2 / OUT=1 / Case 3 4w: IN=2 / OUT=4 / GND=1 / Case=3							Y				
	Metri Pack 150 P2S 2w: IN=B / OUT=A 3w: IN=B / OUT=C / GND=A							5				
	Metri Pack 150 P2S 3w: IN=C / OUT=A / GND=B						1,2	J				
	M12x1 2w: IN=1 / OUT=3 3w: IN=1 / OUT=4 / GND=3							S				
	M12x1 2w: IN=1 / OUT=4 3w: IN=1 / OUT=3 / GND=4							M				
M12x1 2w: IN=1 / OUT=2 3w: IN=1 / OUT=2 / GND=3							P					
<b>Pressure connection <sup>1)</sup></b>	Outside thread										2	
	<sup>7</sup> / <sub>16</sub> -20 UNF										G	
	<sup>7</sup> / <sub>16</sub> -20 UNF sealed at back, SAE-4 ORB with O-ring FPM										V	
	<sup>9</sup> / <sub>16</sub> -18 UNF sealed at back, SAE-6 ORB with O-ring FPM										3	
	<sup>1</sup> / <sub>4</sub> -18 NPT										4	
	G <sup>1</sup> / <sub>4</sub> sealed at back DIN EN ISO 1179-2 with profile seal FPM										H	
	G <sup>1</sup> / <sub>2</sub> sealed at back DIN EN ISO 1179-2 with profile seal FPM										6	
M14x1.5 sealed at back DIN EN ISO 1179-2 with profile seal FPM										7		
R <sup>1</sup> / <sub>4</sub> acc. EN 10226												
<b>Pressure orifice</b>	without									0	1	
	with									2	1	
<b>Pressure range variation (optional)</b>	Indicate W and state range on order (e.g.: W0... + 50bar/Out1...8V)											W

		1	2	3	4	5	6	7	8	9	10	11
<b>Order code selection table in psi</b>		<b>558. X X X X X X X X X X X X</b>										
<b>Pressure mode</b>	Relative	9										
	Absolute	8										
<b>Pressure range <sup>1)</sup></b>	0 ... 100 psi	8	B	7								
	0 ... 200 psi	9	C	1								
	0 ... 300 psi	9	C	2								
	0 ... 500 psi	9	C	3								
	0 ... 750 psi	9	D	0								
<b>Sealing material</b>	EPDM Ethylene propylene				1	0						
	NBR Butadiene Acrylonitrile				2	0						
	FPM Fluoro elastomer				5	0						
<b>Output / Power supply</b>	0 ... 5 V 7 ... 33 VDC						1					
	0 ... 10 V 12 ... 33 VDC						2					
	4 ... 20 mA 7.5 ... 33 VDC						3					
	ratiom. 10 ... 90% 5 VDC ±10%						7					
<b>Electrical connection <sup>2)</sup></b>	Kostal SLK 2.8 coding A						7	1				
	AMP-JPT							2				
	AMP Superseal 1.5							3				
	Deutsch DT04-3P 2w: IN=1 / OUT=3 3w: IN=A / OUT=C / GND=B							4				
	Deutsch DT04-3P 3w: IN=A / OUT=B / GND=C							G				
	Deutsch DT04-4P 3w: IN=2 / OUT=1 / Case 3 4w: IN=2 / OUT=4 / GND=1 / Case=3							Y				
	Metri Pack 150 P2S 2w: IN=B / OUT=A 3w: IN=B / OUT=C / GND=A							5				
	Metri Pack 150 P2S 3w: IN=C / OUT=A / GND=B						1,2	J				
	M12x1 2w: IN=1 / OUT=3 3w: IN=1 / OUT=4 / GND=3							S				
	M12x1 2w: IN=1 / OUT=4 3w: IN=1 / OUT=3 / GND=4							M				
M12x1 2w: IN=1 / OUT=2 3w: IN=1 / OUT=2 / GND=3							P					
<b>Pressure connection <sup>1)</sup></b>	Outside thread											2
	<sup>7</sup> / <sub>16</sub> -20 UNF											G
	<sup>7</sup> / <sub>16</sub> -20 UNF sealed at back, SAE-4 ORB with O-ring FPM											V
	<sup>9</sup> / <sub>16</sub> -18 UNF sealed at back, SAE-6 ORB with O-ring FPM											3
	<sup>1</sup> / <sub>4</sub> -18 NPT											4
	G <sup>1</sup> / <sub>4</sub> sealed at back DIN EN ISO 1179-2 with profile seal FPM											H
	G <sup>1</sup> / <sub>2</sub> sealed at back DIN EN ISO 1179-2 with profile seal FPM											6
M14x1.5 sealed at back DIN EN ISO 1179-2 with profile seal FPM											7	
R <sup>1</sup> / <sub>4</sub> acc. EN 10226												
<b>Pressure orifice</b>	without									0	1	
	with									2	1	
<b>Pressure range variation (optional)</b>	Indicate W and state range on order (e.g.: W0... + 650psi/Out1...8V)											W

<sup>1)</sup> Other pressure ranges and pressure connections on request


<sup>2)</sup> Delivery without female connector

			1	2	3	4	5	6	7	8	9	10	11	
<b>Order code selection table in MPa</b>			558.	X	X	X	X	X	X	X	X	X	X	
<b>Pressure mode</b>	Relative		9											
	Absolute		8											
<b>Pressure range <sup>1)</sup></b>	0 ... 0.6 MPa		8	G	7									
	0 ... 1.6 MPa		9	H	1									
	0 ... 2.5 MPa		9	H	2									
	0 ... 4 MPa		9	H	3									
	0 ... 6 MPa		9	K	0									
<b>Sealing material</b>	EPDM	Ethylene propylene				1	0							
	NBR	Butadiene Acrylonitrile				2	0							
	FPM	Fluoro elastomer				5	0							
<b>Output / Power supply</b>	0 ... 5 V												1	
	0 ... 10 V												2	
	4 ... 20 mA												3	
	ratiom. 10 ... 90%												7	
	Kostal SLK 2.8 coding A												7	1
<b>Electrical connection <sup>2)</sup></b>	AMP-JPT												2	
	AMP Superseal 1.5												3	
	Deutsch DT04-3P	2w: IN=1 / OUT=3	3w: IN=A / OUT=C / GND=B										4	
	Deutsch DT04-3P		3w: IN=A / OUT=B / GND=C										G	
	Deutsch DT04-4P	3w: IN=2 / OUT=1 / Case 3	4w: IN=2 / OUT=4 / GND=1 / Case=3										Y	
	Metri Pack 150 P2S	2w: IN=B / OUT=A	3w: IN=B / OUT=C / GND=A										5	
	Metri Pack 150 P2S		3w: IN=C / OUT=A / GND=B										1,2	J
	M12x1	2w: IN=1 / OUT=3		3w: IN=1 / OUT=4 / GND=3										S
		2w: IN=1 / OUT=4		3w: IN=1 / OUT=3 / GND=4										M
		2w: IN=1 / OUT=2		3w: IN=1 / OUT=2 / GND=3										P
<b>Pressure connection <sup>1)</sup></b>	Outside thread	<sup>7</sup> / <sub>16</sub> -20 UNF										2		
		<sup>7</sup> / <sub>16</sub> -20 UNF sealed at back, SAE-4 ORB with O-ring FPM										G		
		<sup>9</sup> / <sub>16</sub> -18 UNF sealed at back, SAE-6 ORB with O-ring FPM										V		
		<sup>1</sup> / <sub>4</sub> -18 NPT										3		
		G <sup>1</sup> / <sub>4</sub> sealed at back DIN EN ISO 1179-2 with profile seal FPM										4		
		G <sup>1</sup> / <sub>2</sub> sealed at back DIN EN ISO 1179-2 with profile seal FPM										H		
		M14x1.5 sealed at back DIN EN ISO 1179-2 with profile seal FPM										6		
		R <sup>1</sup> / <sub>4</sub> acc. EN 10226										7		
<b>Pressure orifice</b>	without										0		1	
	with										2		1	
<b>Pressure range variation (optional)</b>	Indicate W and state range on order (e.g.: W0... + 5MPa/Out1...8V)												W	

<b>Accessories (supplied loose)</b>			<b>Order Number</b>
Set - Female connector Kostal SLK 2.8 coding A	2 wire (3 wire with 1 blanking plug)		120369
Set - Female connector Kostal SLK 2.8 coding A	3 wire		120368
Set - Female connector AMP JPT	2 wire (3 wire with 1 blanking plug)		110442
Set - Female connector AMP JPT	3 wire		108767
Set - Female connector AMP Superseal 1.5 (0.5 - 1.0 mm <sup>2</sup> )	3 wire (Blanking Plug to enable 2 wire)		120254
Set - Female connector AMP Superseal 1.5 (1.0 - 1.5 mm <sup>2</sup> )	3 wire (Blanking Plug to enable 2 wire)		120255
Set - Female connector Metri Pack 150 P2S Series	3 wire		120345
Calibration certificate			104551

<sup>1)</sup> Other pressure ranges and pressure connections on request

<sup>2)</sup> Delivery without female connector

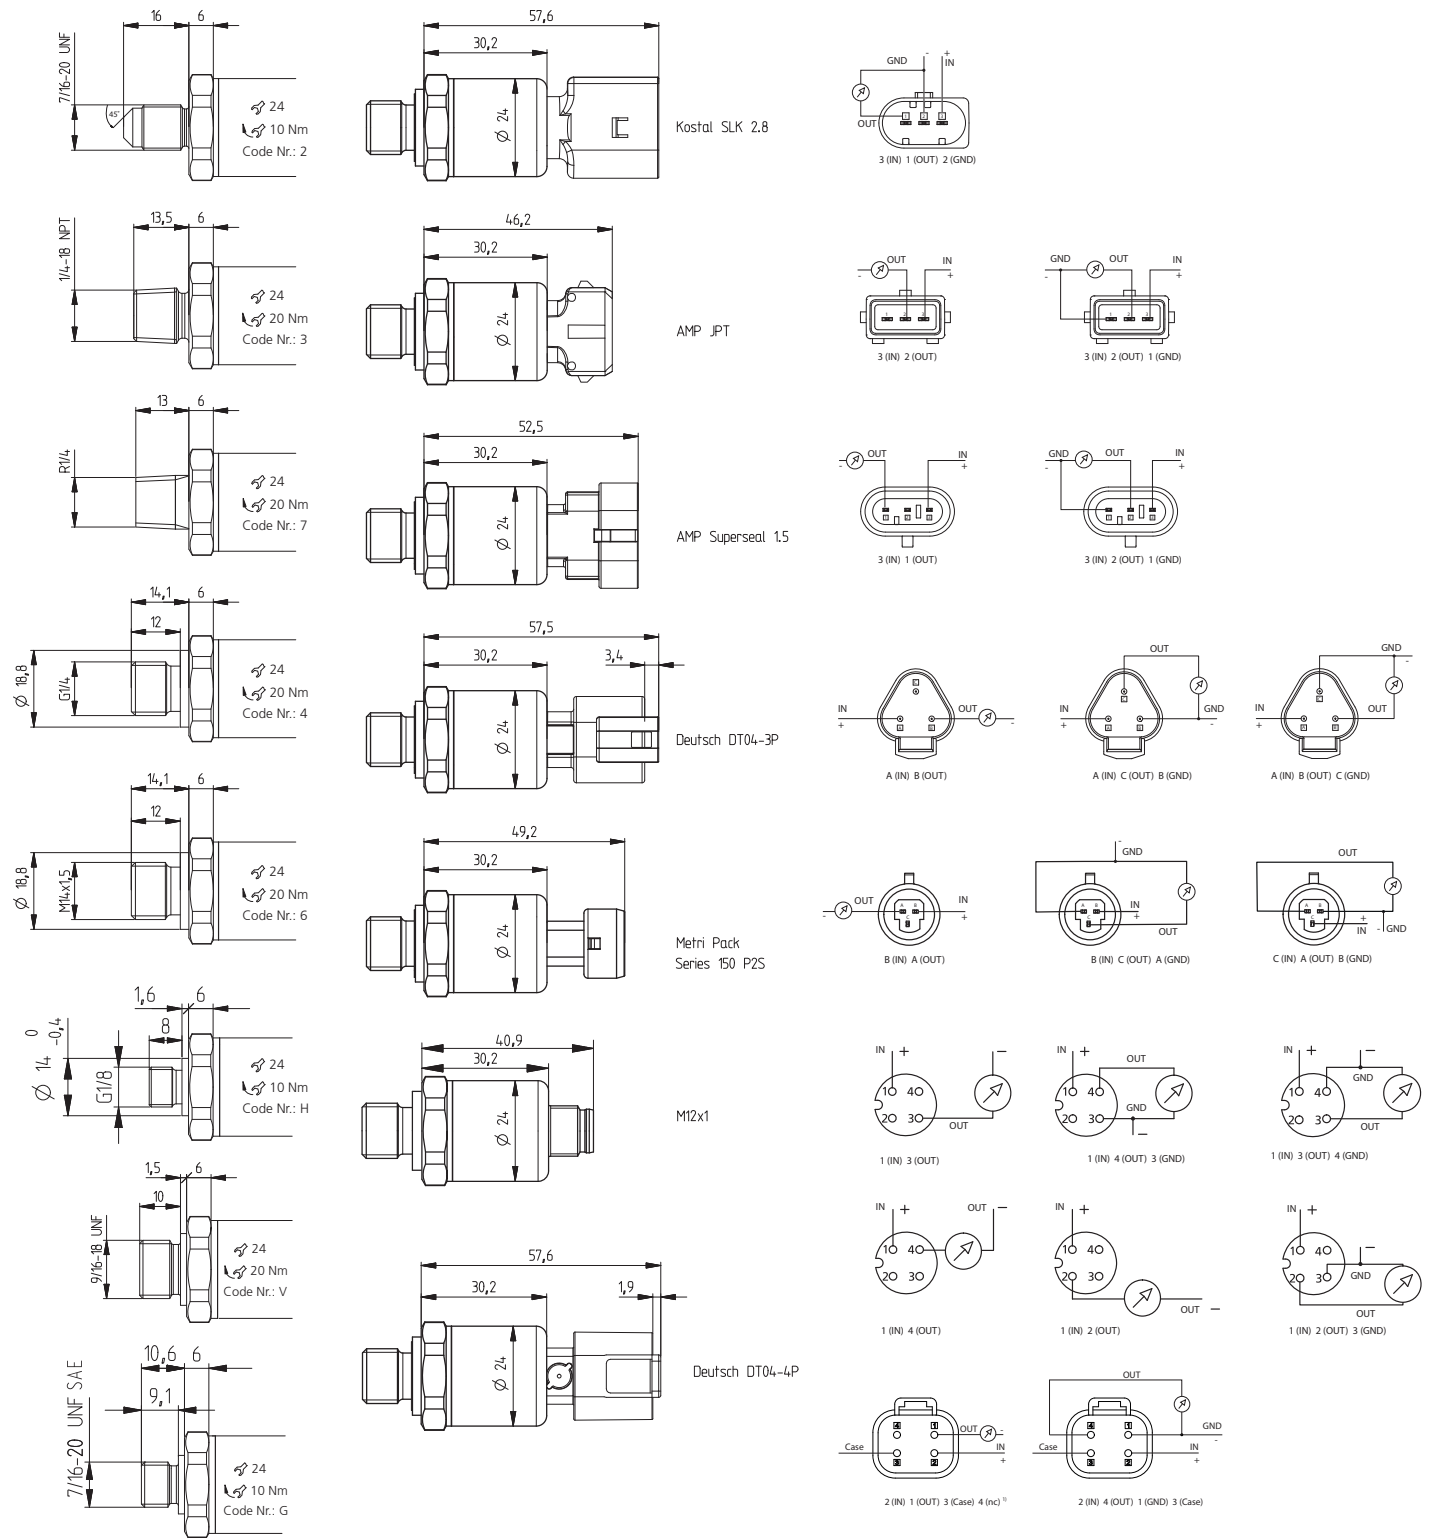

<sup>1)</sup> not connected

**Huba Control AG**

Headquarters Schweiz  
Industriestrasse 17  
CH-5436 Würenlos  
Telefon +41 56 436 82 00  
Fax +41 56 436 82 82  
info.ch@hubacontrol.com

**Huba Control AG**

Vestiging Nederland  
Hamseweg 20A  
NL-3828 AD-Hoogland  
Telefoon +31 33 433 03 66  
Telefax +31 33 433 03 77  
info.nl@hubacontrol.com

**Huba Control AG**

Niederlassung Deutschland  
Schlattgrabenstrasse 24  
D-72141 Walddorfhäslach  
Telefon +49 7127 2393 00  
Fax +49 7127 2393 20  
info.de@hubacontrol.com

**Huba Control USA, Inc.**

Office United States of America  
303 Wyman Street  
Suite #300  
Waltham MA 02451  
Tel: +1 866-6HUBACO (+1 866-648-2226)  
info.usa@hubacontrol.com

**Huba Control SA**

Succursale France  
Rue Lavoisier  
Technopôle Forbach-Sud  
F-57602 Forbach Cedex  
Téléphone +33 3 87 84 73 00  
Télécopieur +33 3 87 84 73 01  
info.fr@hubacontrol.com

**Huba Control AG**

Branch Office United Kingdom  
Unit 13 Berkshire House, County Park Business  
Centre, Shrivenham Road  
Swindon Wiltshire SN1 2NR  
Phone +44 1993 77 66 67  
Fax +44 1993 77 66 71  
info.uk@hubacontrol.com

**[www.hubacontrol.com](http://www.hubacontrol.com)**

