

Pressure transmitters
Differential pressure transmitters
Pressure switches
Vortex flow sensors
Pressure level transmitters



 Pressure and flow

Content

Overview products

PRESSURE TRANSMITTER	PRESSURE RANGE	PAGE	PRESSURE			MEDIUM					
			Relative	Absolute	Differential	Air and neutral gases	Flammable gases	Liquids	Refrigerants	H ₂	
400 OEM	0 ... 0.145 – 14.5 psi	0 ... 10 – 100 mbar	8	✓			✓		✓		
501 OEM	-14.5 ... 0 / 0 ... 870 psi	-1 ... 0 / 0 ... 60 bar	8	✓	✓		✓		✓		
503 OEM	0 ... 36.2 – 362 psi	0 ... 2.5 – 25 bar	8	✓			✓		✓		
505 OEM	0 ... 58 – 232 psi	0 ... 4 – 16 bar	9	✓			✓		✓		
506 OEM	0 ... 145 – 870 psi	0 ... 10 – 60 bar	9	✓			✓		✓		
511 OEM	-14.5 ... 0 / 0 ... 8700 psi	-1 ... 0 / 0 ... 600 bar	9	✓	✓		✓		✓		✓
512	0 ... 580 / 0 ... 14500 psi	0 ... 40 – 1000 bar	10	✓			✓		✓		
515 OEM	-14.5 ... 0 / 0 ... 8700 psi	-1 ... 0 / 0 ... 600 bar	10	✓	✓		✓		✓		
519	0 ... 5.8 – 870 psi	0 ... 0.4 – 60 bar	10	✓			✓		✓		
520	-14.5 ... 130 / 0 ... 36.2 – 14500 psi	-1 ... 9 / 0 ... 2.5 – 1000 bar	11	✓			✓		✓		
522	0 ... 36.2 – 8700 psi	0 ... 2.5 – 600 bar	11	✓			✓		✓		
525	0 ... 7.2 – 870 psi	0 ... 0.5 – 0.6 bar	11	✓			✓		✓		
526	0 ... 1.45 – 8.7 psi	0 ... 0.1 – 0.6 bar	12	✓			✓		✓		
527	0 ... 14.5 – 870 psi	0 ... 1 – 60 bar	12	✓	✓		✓		✓		
528	-14.5 ... 0 / 0 ... 14.5 – 870 psi relative 0 ... 14.5 – 232 psi absolute	-1 ... 0 / 0 ... 1 – 60 bar relative 0 ... 1 – 16 bar absolute	12	✓	✓		✓		✓		
540	0 ... 870 – 8700 psi	0 ... 60 – 600 bar	13	✓			✓		✓		
548	-14.5 ... 0 / 0 ... 14.5 – 580 psi	-1 ... 0 / 0 ... 1 – 40 bar	13	✓			✓		✓		
550	0 ... 580 – 8700 psi	0 ... 40 – 600 bar	13	✓			✓		✓		
555	0 ... 145 – 13050 psi	0 ... 10 – 900 bar	14	✓			✓		✓		✓
558	0 ... 87 – 870 psi	0 ... 6 – 60 bar	14	✓	✓		✓		✓		
560	-14.5 ... 101 / 0 ... 145 – 2175 psi	-1 ... 7 / 0 ... 10 – 150 bar	14	✓			✓		✓		
680	0 ... 1.45 – 8.7 / 0 ... 14500 psi	0 ... 100 – 600 mbar / 0 ... 1 – 1000 bar	15	✓	✓		✓		✓		

DIFFERENTIAL PRESSURE TRANSMITTERS											
401 OEM	0 ... 0.04 – 0.12 psi	0 ... 3 – 8 mbar	15	✓		✓	✓				
402	0 ... 0.04 – 0.72 psi	0 ... 3 – 50 mbar	15	✓		✓	✓				
403 OEM	0 ... 0.04 – 0.12 psi	0 ... 3 – 8 mbar	16	✓		✓	✓	✓			
450	-0.02 ... 0.02 / 0 ... 0.04 – 1.45 psi	-1.5 ... 1.5 mbar / 0 ... 3 – 100 mbar	16	✓		✓	✓				
652	0 ... 0.72 – 14.5 psi	0 ... 50 – 1000 mbar	16	✓		✓	✓		✓		
664	-0.07 ... 0.07 / 0 ... 0.07 – 29 psi 11.6 ... 17.4 psi barometric	-5 ... 5 / 0 ... 5 – 2000 mbar 800 ... 1200 mbar barometric	17	✓		✓	✓				
692	0 ... 1.45 – 360 psi	0 ... 0.1 – 25 bar	17	✓		✓	✓		✓		
698	-0.07 ... 0.07 / 0 ... 0.014 – 7.25 psi differential -14.5 ... 0 / 0 ... 14.5 – 145 psi relative	-5 ... 5 / 0 ... 1 – 500 mbar differential -1 ... 0 / 0 ... 1 – 10 bar relative	17	✓		✓	✓				
699	0 ... 0.04 – 0.72 psi	0 ... 30 – 5000 Pa	18	✓		✓	✓				
699M	0 ... 0.07 – 1.0 psi	0 ... 500 – 7000 Pa	18	✓		✓	✓				

PRESSURE LEVEL TRANSMITTERS											
711	0 ... 1.45 – 232 psi	0 ... 0.1 – 10 bar	18	✓					✓		
712	0 ... 4.35 – 36.25 psi relative 11.6 ... 20.3 – 43.5 psi absolute	0 ... 0.3 – 3 bar 0 ... 0.8 – 3 bar absolute	19	✓	✓				✓		
713	0 ... 8.7 – 23.2 psi relative 11.6 ... 20.3 – 87 psi absolute	0 ... 0.6 – 16 bar 0 ... 0.8 – 6 bar absolute	19	✓	✓				✓		

ELECTRONIC PRESSURE SWITCHES											
521	0 ... 29 – 8700 psi	0 ... 2.5 – 600 bar	19	✓			✓		✓		
529	-14.5 ... 0 / 0 ... 14.5 – 870 psi	-1 ... 0 – 60 bar	20	✓	✓		✓		✓		

MECHANICAL PRESSURE SWITCHES											
604	0.08 ... 1.2 – 20 inWC	0.2 ... 50 mbar	20	✓		✓	✓				
605 OEM	0.08 ... 1.6 inWC	20 ... 400 Pa	20	✓		✓	✓				
620/625	-0.058 ... 13 / 0.029 ... 006 – 87 psi	-900 ... 6000 mbar	21	✓		✓	✓		✓		
630	0.087 ... 14.5 / 14.5 ... 43.5 – 79.8 psi	6 ... 5500 mbar	21	✓		✓	✓		✓		

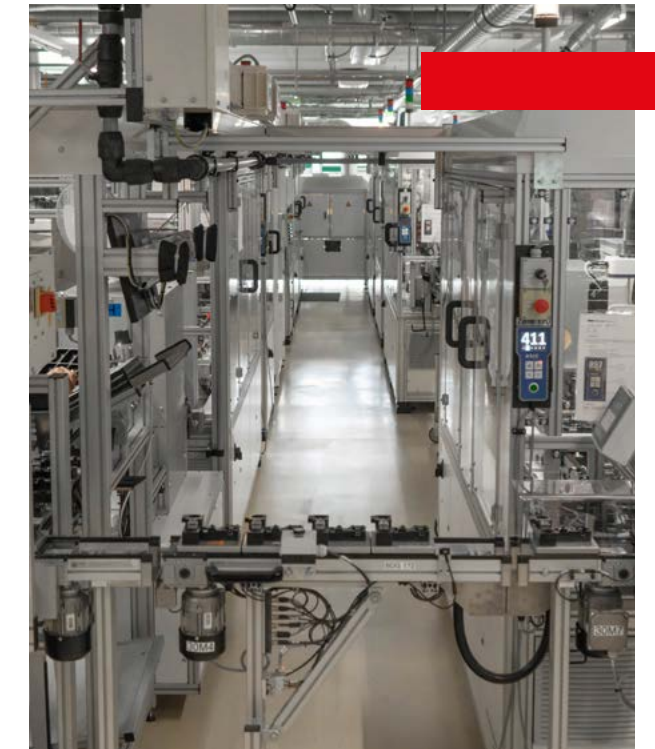
FLOW SENSORS											
200 OEM	0.132 ... 39.6 gal/min	0.5 ... 150 l/min	21						✓		
210	0.132 ... 39.6 gal/min	0.5 ... 150 l/min	22						✓		
230	0.475 ... 39.6 gal/min	1.8 ... 150 l/min	22						✓		
235 OEM	0.238 ... 63.4 gal/min	0.9 ... 240 l/min	22						✓		
236	0.238 ... 63.4 gal/min	0.9 ... 240 l/min	23						✓		
240	0.132 ... 39.6 gal/min	0.5 ... 150 l/min	23						✓		

Huba Control – the fine difference

Components for measuring pressure and flow are our specialty

Since 1945, the name Huba Control has been synonymous with exceptional quality, top performance and innovation. A claim that spurs and drives our dedicated employees to give their best for our customers every day. Because the needs of our customers are at the centre of everything we do – today and in the future.

The focus on pressure and flow measurement is the cornerstone of our success and allows us to develop innovative products and produce them using state of the art manufacturing equipment. Our products are used in applications for process optimization in systems, machines and plants and make an important contribution to process reliability and energy efficiency.



The best under pressure

Individual and efficient solutions for every need

Sensor elements and fully calibrated, ready-to-use pressure transmitters, pressure switches and flow sensors are manufactured on state-of-the-art, highly automated production facilities. In-depth process knowledge and comprehensive control of our supply chain guarantee quality, flexibility and cost efficiency.

Our core competence is hybrid thick-film technology, which we have been refining and perfecting for decades. This expertise allows us to manufacture sensor elements made of steel and ceramics, which have already proven themselves millions of times under the most difficult conditions. Long-term stable transmitters can thus be manufactured for even the finest pressures in the Pascal range.

For us, uncompromising customer proximity and individual consultation are the foundation of a partnership-based cooperation. We accompany our customers from the first product idea to the successful implementation. Quality, sustainability and the safety of our employees

are the focus of our actions and thinking. An integrated, process-oriented management system creates the conditions for fulfilling this corporate policy. At the heart of our success story are entrepreneurial and professional employees are at the heart of our success

story. Their professionalism ensures that our products and services meet the highest quality standards and also reflects our commitment to responsible and customer-orientated action.



We can handle pressure.

1 mbar ... 1000 bar



Vortex Flow sensors

Flow measurement based on the Kármán vortex street



Pressure transmitter

Measurement of pressure in liquids and gases



Differential pressure transmitter

Measurement of pressure changes in liquids and gases



Pressure switch

Electronic or mechanical pressure monitoring



Pressure level transmitter

Level detection of liquids in tanks and containers

Markets and presence

The clear focus on pressure measurement technology allows the development of innovative products. A wide range of products meets the most diverse requirements for process optimisation in systems, machines and plants. Our sales engineers at our headquarters in Switzerland and our subsidiaries – from Germany to France and the USA – as well

as our specialised representatives around the world ensure the best possible advice. The target markets for Huba Control in the field of pressure and flow measurement technology are control and monitoring tasks for a wide range of industrial automation applications as well as special pressure transducers, components for gas wall heaters (GAS), heating,

ventilation, air conditioning (HVAC) and the automotive industry. Huba Control is the market leader in the sub-markets of gas boilers and HVAC. 97% of the products are exported.



> 40
Locations worldwide

530
Employees worldwide

Headquarters
Switzerland

OEM PRESSURE TRANSMITTER TYPE 400

The 400 series pressure transmitters with a special development design for large-scale production are ideal for continuous level measurement in containers. Production is fully automatic, including inline adjustment for zero point and final value.

MEDIUM

Liquids and neutral gases

PRESSURE RANGE

0 ... 0.145 – 14.5 psi
0 ... 10 – 100 mbar

OUTPUT

ratiom. 10 ... 70%

ACCURACY

< 0.3% FS

ELECTRICAL CONNECTION

Wire RAST 2.5

PRESSURE CONNECTION

Pipe Ø 6.2 mm

- + Robust construction, sensor element has no contact with media
- + Special design developed for large scale manufacture at an attractive price
- + Special snap mounting bracket for easy single handed mounting in sheet steel of varying thicknesses



OEM PRESSURE TRANSMITTER TYPE 501

Type 501 pressure transmitters, with automated production processes, are suitable for larger quantity industrial OEM applications. Various pressure and electrical connections, together with several standardised output signals, provide suitability for a wide variety of applications.

MEDIUM

Liquids and gases

PRESSURE RANGE

-14.5 ... 0 / 0 ... 870 psi
-1 ... 0 / 0 ... 60 bar

OUTPUT

ratiom. 10% ... 90%, 0 ... 5 V,
1 ... 6 V, 0 ... 10 V, 4 ... 20 mA

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Connector DIN EN 175301-803-A or C,
cable 1.5 m, M12x1

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact construction
- + Automated manufacture in large quantities for ideal price / performance ratio
- + Robust ceramic sensor technology
- + High resistance to extreme temperatures



OEM PRESSURE TRANSMITTER TYPE 503

Type 503 pressure transmitters, with their excellent price / performance ratio, are specially designed for industrial OEM applications. Partially automated production techniques allow us to produce high quantities, yet retaining the flexibility to offer different versions.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 36.2 – 362 psi
0 ... 2.5 – 25 bar

OUTPUT

ratiom. 10 ... 90%, 0 ... 5 V,
0 ... 10 V, 4 ... 20 mA

ACCURACY

< 1.0% FS

ELECTRICAL CONNECTION

Connector DIN EN 175301-803-A,
cable 1.5 m, connector RAST 2.5

PRESSURE CONNECTION

Outside thread or plug connector

- + Partial automatic production, giving ideal price / performance ratio
- + Ideal for use as a control element, as a result of a small hysteresis
- + Incorporates all the benefits of ceramic technology for industrial applications



OEM PRESSURE TRANSMITTER TYPE 505

Type 505 pressure transmitters are particularly suitable for measuring water pressure rates in heating and industrial circular flow. Due to partially automated manufacturing we are able to handle customer orders in high quantities.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 58 – 232 psi
0 ... 4 – 16 bar

OUTPUT

ratiom. 10 ... 70%, ratiom. 10 ... 50%,
0.5 ... 3.5 V

ACCURACY

< 1.0% FS

ELECTRICAL CONNECTION

Connector RAST 2.5

PRESSURE CONNECTION

Outside thread or plug connector

- + Best price / performance ratio through: electronic integrated in measuring element, optimised mounting concept and automatic production
- + Ideal for use as a control element, as a result of a small hysteresis



OEM PRESSURE TRANSMITTER TYPE 506

Type 506 pressure transmitters are suitable for different applications in the field of industrial refrigeration due to its application specific pressure connections. Automated manufacturing allows the efficient production of large quantities, resulting in an excellent price / performance ratio.

MEDIUM

Refrigerants

PRESSURE RANGE

0 ... 145 – 870 psi
0 ... 10 – 60 bar

OUTPUT

ratiom. 10 ... 90%, 0 ... 5 V,
1 ... 6 V, 0 ... 10 V, 4 ... 20 mA

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Connector DIN EN 175301-803-A or C,
cable 1.5 m, M12x1

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact construction
- + Automated manufacture in large quantities for ideal price / performance ratio
- + Robust ceramic sensor technology
- + High resistance to extreme temperatures



OEM PRESSURE TRANSMITTER TYPE 511

Type 511 pressure transmitters meet the highest specifications for longevity, accuracy, temperature stability and EMC characteristics, making them suitable for an extremely wide range of demanding industrial applications.

MEDIUM

Liquids and gases

PRESSURE RANGE

-14.5 ... 0 / 0 ... 8700 psi
-1 ... 0 / 0 ... 600 bar

OUTPUT

0 ... 5 V, 1 ... 6 V, 0 ... 10 V, 4 ... 20 mA

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Cable 1.5 m, swift connector, AMP JPT, M12x1,
connector DIN EN 175301-803-C

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction for highest operational reliability
- + No media egress when exceeding rupture pressure
- + Negligible temperature influence on accuracy
- + Excellent EMC capacity
- + Saving the customer time with the swift connector cable mounting system



PRESSURE TRANSMITTER TYPE 512

The pressure transmitter Type 512 with cable connection meets the highest demands of industrial and mobil hydraulic applications. This sensor is available with protection standard IP 69K. The standard pressure orifice prevents damage due to pressure peaks. The compact and rugged design meets the requirement of shock- and vibration stability according Kfz-norm ISO 16750. The pressure transmitter type 512 guarantees highest EMC stability according to various road vehicle regulations with test level up to 100V/m.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 580 / 0 ... 14500 psi
0 ... 40 – 1000 bar

OUTPUT

ration. 10 ... 90%, 0 ... 5 V,
1 ... 6 V, 0 ... 10 V, 4 ... 20 mA

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Cable PUR 1.5 m

PRESSURE CONNECTION

Outside thread

- + Rugged PUR cable with IP 69K
- + Welded construction – no elastomer seals
- + Negligible temperature influence on accuracy
- + Excellent EMC capacity
- + Compact and rugged construction for highest operational reliability



OEM PRESSURE TRANSMITTER TYPE 515

Type 515 pressure transmitter with cable connection meets the highest demands for industry and vehicle manufacturing applications. The compact and robust mechanical design incorporating IP 69K protection allows for use in the most stringent of conditions.

MEDIUM

Liquids

PRESSURE RANGE

-14.5 ... 0 / 0 ... 8700 psi
-1 ... 0 / 0 ... 600 bar

OUTPUT

ration. 10 ... 90%, 0 ... 5 V,
1 ... 6 V, 0 ... 10 V, 4 ... 20 mA

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Cable 1.5 m

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction for highest operational reliability
- + Negligible temperature influence on accuracy
- + Excellent EMC capacity
- + IP 69K



PRESSURE TRANSMITTER TYPE 519

The pressure transmitter Type 519 has a compact and robust design and a very high measurement accuracy. The flush diaphragm offers the use in the process technique of pasty media. Beside various pressure- and electrical connectors there are pressure ranges from 400mbar to 60bar full scale available. This sensor utilises ceramic technology developed by Huba Control and used millions of times over for decades.

MEDIUM

Liquids, gases and Pasty media

PRESSURE RANGE

0 ... 5.8 – 870 psi
0 ... 0.4 – 60 bar

OUTPUT

ration. 10 ... 90%, 0 ... 5 V,
1 ... 6 V, 0 ... 10 V, 4 ... 20 mA

ACCURACY

± 0.3% FS

ELECTRICAL CONNECTION

Connector DIN EN 175301–803–A or C,
connector M12x1

PRESSURE CONNECTION

Outside thread

- + Flush diaphragm
- + Very high measurement accuracy
- + Excellent thermal characteristic
- + There are low pressure ranges from 400 mbar full scale available
- + Compact and rugged construction
- + Available with temperature measurement



PRESSURE TRANSMITTER TYPE 520

The compact Type 520 pressure transmitter is based upon the Huba Control developed thick film technology where the pressure measuring cell is fully welded. This transmitter meets the high burst protection demands and is suitable for the use in all types of refrigerants including ammonia.





MEDIUM

Liquids, gases and refrigerants

PRESSURE RANGE

-14.5 ... 130 / 0 ... 36.2 – 14500 psi
-1 ... 9 / 0 ... 2.5 – 1000 bar

OUTPUT

0 ... 5 V, 1 ... 6 V, 0 ... 10 V,
ration. 10 ... 90% , 4 ... 20 mA , IO-Link

ACCURACY

typ. < 0.3% FS

ELECTRICAL CONNECTION

Swift connector, metriPack series 150,
connector DIN 175301–803–A or C, M12x1,
braids, connector RAST 2.5

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction
- + Welded construction – no elastomer seals
- + Saving time by quick cable mounting by the customer with swift connector
- + Wide choice of connections available



PRESSURE TRANSMITTER TYPE 522

The compact Type 522 pressure transmitter for shipbuilding is based upon the Huba Control developed thick film technology where the pressure measuring cell is fully welded. Applications requiring high burst pressure can be met with the Type 522 which is also certificated to meet the leading shipbuilding requirements.


MEDIUM

Liquids, gases and refrigerants
incl. ammonia

PRESSURE RANGE

0 ... 36.2 – 8700 psi
0 ... 2.5 – 600 bar

OUTPUT

0 ... 10 V, 4 ... 20 mA 

ACCURACY

typ. < 0.3% FS

ELECTRICAL CONNECTION

Connector DIN 175301–803–A, M12x1,
swift connector

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction
- + Welded construction – no elastomer seals
- + Certified for shipbuilding with:
Germanischer Lloyd | American
Bureau of Shipping | Bureau Veritas
Det Norske Veritas | Lloyd's Register



PRESSURE TRANSMITTER TYPE 525

The pressure transmitter Type 525 has a compact and robust design and a very high measurement accuracy. The pressure transmitter with its large variety of pressure- and electrical connection has also pressure ranges from 50mbar full scale. The compact 525 pressure transmitter is based on the ceramic technology developed by Huba Control and used millions of times over for decades.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 7.2 – 870 psi
0 ... 0.5 – 0.6 bar

OUTPUT

0 ... 5 V, 0 ... 10 V, 4 ... 20 mA
ration. 10 ... 90%

ACCURACY

± 0.35% FS

ELECTRICAL CONNECTION

Connector DIN 175301–803–A or C,
M12x1, swift connector

PRESSURE CONNECTION

Inside thread or outside thread

- + Very high measurement accuracy
- + Excellent thermal characteristic
- + Compact and rugged construction
- + Large selection of electrical and pressure connections available
- + Pressure ranges from 50 mbar full scale available



PRESSURE TRANSMITTER TYPE 526

The compact Type 526 is based on the ceramic technology developed by Huba Control and used millions of times over for decades. The pressure transmitter with its large variety of pressure- and electrical connection has also pressure ranges from 100mbar full scale. These units are available in high quantities for OEM customers with an excellent price to performance ratio.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 1.45 – 8.7 psi
0 ... 0.1 – 0.6 bar

OUTPUT

ration. 10 ... 90%

ACCURACY

± (1.8 mbar + 0.2% FS)

ELECTRICAL CONNECTION

Connector DIN 175301–803–A or C, M12x1

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction
- + Ideal price / performance ratio
- + Pressure ranges from 100 mbar full scale available
- + Large selection of electrical and pressure connections available



PRESSURE TRANSMITTER TYPE 527

The compact Type 527 pressure transmitter is based upon the well proven ceramic technology developed by Huba Control decades ago. These transmitters are suitable for applications across a broad spectrum of industries and shipbuilding.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 14.5 – 870 psi
0 ... 1 – 60 bar

OUTPUT

0 ... 10 V, 4 ... 20 mA

ACCURACY

typ. < 0.3% FS

ELECTRICAL CONNECTION

Connector DIN 175301–803–A, M12x1, swift connector

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction
- + Negligible temperature influence on accuracy
- + Certified for shipbuilding with: Germanischer Lloyd | American Bureau of Shipping | Bureau Veritas Det Norske Veritas | Lloyd's Register



PRESSURE TRANSMITTER TYPE 528

The compact Type 528 pressure transmitter is based upon the well proven ceramic technology developed by Huba Control decades ago. These transmitters are suitable for applications across a broad spectrum of industries.



MEDIUM

Liquids and gases

PRESSURE RANGE

-14.5 ... 0 / 0 ... 14.5 – 870 psi relative
0 ... 14.5 – 232 psi absolute
-1 ... 0 / 0 ... 1 – 60 bar relative
0 ... 1 – 16 bar absolute

OUTPUT

0 ... 5 V, 1 ... 6 V, 0 ... 10 V,
ration. 10 ... 90%, 4 ... 20 mA, IO-Link

ACCURACY

typ. < 0.3% FS

ELECTRICAL CONNECTION

Swift connector, MetriPack Series 150, connector DIN 175301–803–A or C, M12x1, braids, connector RAST 2.5

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction
- + Negligible temperature influence on accuracy
- + Saving the customer time with the swift connector cable mounting system
- + Wide choice of connections available



PRESSURE TRANSMITTER TYPE 540

The μ P-regulated, programmable pressure transmitter Type 540 has a robust industry design. The parameters are easily adjustable with two function keys in the configuration menu which enable up to two switching points to be set. All systems are equipped with a diagnostic function. The large 4 digit LED display assures a good accuracy of reading. The pressure transmitter Type 540 is based upon the Huba Control developed thick film technology where the pressure measuring cell is fully welded.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 870 – 8700 psi
0 ... 60 – 600 bar

OUTPUT

0 ... 10 V, 4 ... 20 mA

ACCURACY

< 1.0% FS

ELECTRICAL CONNECTION

M12x1

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction
- + High over pressure
- + Clearly readable display
- + Diagnostic function
- + Up to 2 programmable switching outputs



PRESSURE TRANSMITTER TYPE 548

The μ P-regulated, programmable pressure transmitter Type 548 has a robust industry design. The parameters are easily adjustable with two function keys in the configuration menu which enable up to two switching points to be set. All systems are equipped with a diagnostic function. The large 4 digit LED display assures a good accuracy of reading. The pressure transmitter Type 548 is based upon the well proven ceramic technology developed by Huba Control decades ago.

MEDIUM

Liquids and gases

PRESSURE RANGE

-14.5 ... 0 / 0 ... 14.5 – 580 psi
-1 ... 0 / 0 ... 1 – 40 bar

OUTPUT

0 ... 10 V, 4 ... 20 mA

ACCURACY

< 1.0% FS

ELECTRICAL CONNECTION

M12x1

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction
- + High over pressure
- + Clearly readable display
- + Diagnostic function
- + Up to 2 programmable switching outputs



PRESSURE TRANSMITTER TYPE 550

The pressure transmitter Type 550 meets the highest requirements for mobile hydraulic applications. This sensor is available with protection standard IP 67 or IP 69K. The standard pressure orifice prevents damage due to pressure peaks. The compact and rugged design meets the requirement of shock- and vibration stability according road vehicle standards ISO 16750. The pressure transmitter type 550 guarantees highest EMC stability according to various road vehicle regulations with test level up to 100V/m.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 580 – 8700 psi
0 ... 40 – 600 bar

OUTPUT

0 ... 5 V, 0 ... 10 V, 4 ... 20 mA,
ration. 10 ... 90%

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Kostal SLK 2.8, AMP–JPT, AMP Superseal 1.5, Deutsch DT04–3P, Deutsch DT04–4P, M12x1, MetriPack Series 150

PRESSURE CONNECTION

Outside thread

- + Compact and rugged construction for high operating reliability
- + Welded construction–no elastomer seals
- + Negligible temperature influence on accuracy
- + Excellent EMC capacity
- + Wide choice of connections available



PRESSURE TRANSMITTER TYPE 555

The pressure transmitter Type 555 has been developed for alternative drive systems. This high-pressure transmitter is suitable for vehicles and stationary applications thanks to the hydrogen approval acc. EC79. The compact and rugged design meets the requirement of shock- and vibration stability according to the road vehicle standards ISO 16750. The measuring cell is based upon the Huba Control developed thick film technology on stainless steel and is fully hermetically welded.

MEDIUM

Gaseous hydrogen

PRESSURE RANGE

0 ... 145 – 13050 psi
0 ... 10 – 900 bar

OUTPUT

0 ... 5 V, 0 ... 10 V, 4 ... 20 mA
ratiom. 10 ... 90%

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Kostal SLK 2.8, AMP-JPT, AMP Superseal 1.5, Deutsch DT04-3P, Deutsch DT04-4P, M12x1, Metri Pack Series 150

PRESSURE CONNECTION

Inside thread

- + Suitable for gaseous hydrogen
- + Compact and rugged construction for highest operational reliability
- + Welded without sealing Parts, no elastomer seals
- + Negligible temperature influence on accuracy
- + Excellent EMC capacity



PRESSURE TRANSMITTER TYPE 558

The pressure transmitter Type 558 meets the highest requirements for the industry and vehicle manufacturing. This sensor is available with protection standard IP 67 or IP 69K. The optional pressure orifice prevents damage due to pressure peaks. The compact and rugged design meets the requirement of shock- and vibration stability according road vehicle standards ISO 16750. The pressure transmitter type 558 guarantees highest EMC stability according to various road vehicle regulations with test level up to 100V/m.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 87 – 870 psi
0 ... 6 – 60 bar

OUTPUT

0 ... 5 V, 0 ... 10 V, 4 ... 20 mA
ratiom. 10 ... 90%

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Kostal SLK 2.8, AMP-JPT, AMP Superseal 1.5, Deutsch DT04-3P, Deutsch DT04-4P, M12x1, Metri Pack Series 150

PRESSURE CONNECTION

Outside thread

- + Compact and rugged construction for high operating reliability
- + Excellent EMC capacity
- + Wide choice of connections available
- + Negligible temperature influence on accuracy



PRESSURE TRANSMITTER TYPE 560

Thanks to its hermetically welded design, the 560 pressure transmitter is the ideal solution for a wide range of applications with refrigerants and media in safety classes A2L and A3. It is based on proven Huba Control stainless steel sensor technology. Thanks to its selection of pressure connections, it can be optimally integrated into a wide range of applications.

MEDIUM

Refrigerants

PRESSURE RANGE

-14.5 ... 101 / 0 ... 145 – 2175 psi
-1 ... 7 / 0 ... 10 – 150 bar

OUTPUT

4 ... 20 mA
ratiom. 10 ... 90%

ACCURACY

± 0.5% FS

ELECTRICAL CONNECTION

Metri Pack 150 P2S Series, swift connector (PG9)

PRESSURE CONNECTION

Inside thread, outside thread or soldering connection

- + Compact and robust design
- + Hermetically sealed in accordance with EN ISO 14903:2017 tested during manufacture by means of 100% helium leakage control
- + Two colour versions of connectors
- + Rated according to DIN EN 60335-2-40
- + Copper soldering tube for optimal integration into your copper pipe system



PRESSURE TRANSMITTER TYPE 680

The pressure transmitters of Type 680 with piezoresistive measuring elements have compensated, calibrated and amplified sensor signals which are available as standard voltage or current outputs. The transmitter housing is available with various pressure and electrical connections.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 1.45 – 8.7 / 0 ... 14500 psi
0 ... 100 – 600 mbar / 0 ... 1 – 1000 bar

OUTPUT

0 ... 5 V, 0 ... 10 V, 4 ... 20 mA

ACCURACY

< 0.25% FS (< 0.05% FS on request)

ELECTRICAL CONNECTION

Cable in several lengths, Lumberg RSF4 or RSF50, connector DIN EN 175301-803-A, Binder 723

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact construction with SMD technology enhances operational reliability in the presence of shock and vibration
- + Welded construction provides 100% sealing against media
- + Effective overload protection due to chemically etched chip diaphragm and specially designed glass gland



OEM DIFFERENTIAL PRESSURE TRANSMITTER TYPE 401

Type 401 pressure transmitters sense ultra fine changes in air pressure and are designed to provide optimum control. The dual component diaphragm with it's unique geometry, gives highly sensitive operation and excellent repeatability, even in the range below 20 Pascal.

MEDIUM

Air and neutral gases

PRESSURE RANGE

0 ... 0.04 – 0.12 psi
0 ... 3 – 8 mbar

OUTPUT

0.5 ... 4.5 V

ACCURACY

< 0.3% FS

ELECTRICAL CONNECTION

Connector RAST 2.5

PRESSURE CONNECTION

Hose connector Ø 6.2 mm

- + Special development for optimize of combustion mixture in gas boilers
- + With the special diaphragm geometry inherently stable due to homogeneous manufacture
- + Ideal dimensioning for high sensitivity and with long-term stability
- + Excellent repeatability even in the lower pressure range (< 20 Pascal)



DIFFERENTIAL PRESSURE TRANSMITTER TYPE 402

Type 402 pressure transmitters are ideally suited to measuring fine air flow in air conditioning systems, and fine pressures in the environmental / medical technology sectors. Individually ranged sensors ensure optimum accuracy and long-term stability of measurement. Location is quick and easy, either via a mounting plate or directly onto a PCB.

MEDIUM

Air and neutral gases

PRESSURE RANGE

0 ... 0.04 – 0.72 psi
0 ... 3 – 50 mbar

OUTPUT

0.5 ... 4.5 V

ACCURACY

< 0.6% FS

ELECTRICAL CONNECTION

Connector RAST 2.5, pins for PCB mounting

PRESSURE CONNECTION

Hose connector Ø 6.2 mm

- + Attractive price / performance ratio
- + Excellent synergy of diaphragm technology and ceramic elements
- + Special adapter for top-hat rail mounting
- + Direct pcb mounting with simple snap-on system



OEM DIFFERENTIAL PRESSURE TRANSMITTER

TYPE 403

Type 403 pressure transmitters sense ultra-fine changes in gas pressure for use in air / gas ratio control systems. All materials used are compatible with flammable gas. When used in combination with our Type 401 pressure transmitter, the optimum air / gas ratio can be achieved.

MEDIUM

Flammable gas

PRESSURE RANGE

0 ... 0.04 – 0.12 psi
0 ... 3 – 8 mbar

OUTPUT

0.5 ... 4.5 V

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Connector RAST 2.5

PRESSURE CONNECTION

Hose connector Ø 6.2 mm

- + Special development for optimize of combustion mixture in gas boilers
- + With the special diaphragm geometry inherently stable due to homogeneous manufacture
- + Ideal dimensioning for high sensitivity and with long-term stability
- + Excellent repeatability even in the lower pressure range (< 20 Pascal)



DIFFERENTIAL PRESSURE TRANSMITTER

TYPE 450

The pressure transmitter Type 450 is a robust sensor integrated in a compact housing for the use in various applications with air or neutral gases. Pollutions with small Particles do not harm the function of this pressure transmitter. The type 450 is ideal for HVAC applications. Additionally to the analogue output the pressure transmitter type has a digital output I²C. These output signals are temperature compensated, linear and reinforced. The transmitter is fitted directly on a PCB.

MEDIUM

Air and neutral gases

PRESSURE RANGE

-0.02 ... 0.02 / 0 ... 0.04 – 1.45 psi
-1.5 ... 1.5 mbar / 0 ... 3 – 100 mbar

OUTPUT

0.5 ... 4.5 V, Digital ZACWire™ 10 ... 90% of 2¹⁴ Digits, Digital I²C™ 10 ... 90% of 2¹⁴ Digits, ratiom. 10 ... 90%

ACCURACY

< 1.5% FS

ELECTRICAL CONNECTION

Pins for PCB mounting

PRESSURE CONNECTION

Hose connector

- + Suitable for low pressure measurements
- + Excellent accuracy and long-term stability over the entire measuring range
- + Temperature compensated, linear and amplified output signal



DIFFERENTIAL PRESSURE TRANSMITTER

TYPE 652

Type 652 pressure transmitters are ideally suited to the continuous monitoring of liquid and gas flow (or level) in heating, ventilation and process technology. Their especially rugged construction allows a single port over-pressure of up to 20 bar, depending upon pressure range.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 0.72 – 14.5 psi
0 ... 50 – 1000 mbar

OUTPUT

0 ... 10 V, 4 ... 20 mA

ACCURACY

< 1.5% FS

ELECTRICAL CONNECTION

Screw terminals

PRESSURE CONNECTION

Inside thread

- + High overpressure safety margin 10/20 bar on P1
- + 3 standardised output signals for direct Processing in control / monitoring systems
- + Functionally simple, rugged mechanics with high operating reliability
- + Attractive price / performance ratio



DIFFERENTIAL PRESSURE TRANSMITTER

TYPE 664

The pressure transmitter Type 664 is designed for low pressure measurements in air and neutral gases environments. The type 664 is based on silicon technology with good accuracy and long --term performance characteristics. The compact housing dimensions of the type 664 makes suitable for applications where the size plays an important role, it is also provided with I²C digital output additionally to analogue and ratiometric outputs.

MEDIUM

Air and neutral gases

PRESSURE RANGE

-0.07 ... 0.07 / 0 ... 0.07 – 29 psi
11.6 ... 17.4 psi barometric
-5 ... 5 / 0 ... 5 – 2000 mbar
800 ... 1200 mbar barometric

OUTPUT

Digital I²C™ 10 ... 90% von 2¹⁵ Digits, ratiom. 10 ... 90%, 0.5 ... 4.5 V

ACCURACY

< 0.4% FS

ELECTRICAL CONNECTION

3 pole connector RAST 2.5, pins for PCB mounting

PRESSURE CONNECTION

Hose connector, Plastic screw connection

- + Mounting on PCB possible
- + Robust design
- + The output signal is temperature compensated (from -20 up to +70 °C), linearized and amplified



DIFFERENTIAL PRESSURE TRANSMITTER

TYPE 692

Type 692 pressure transmitters have a unique, well proven ceramic technology. There are variety of pressure and electrical connections available, together with several standardised output signals. The wide variety of options makes these transmitters ideal for applications across a broad spectrum of industries.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 1.45 – 360 psi
0 ... 0.1 – 25 bar

OUTPUT

0 ... 5 V, 0 ... 10 V, 4 ... 20 mA

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Cable 1.5 m, Connector DIN EN 175301-803-A, Connector DIN EN 60130-9

PRESSURE CONNECTION

Hose connector or screw fitting, outside thread, adapter inside- and outside thread

- + Very low temperature sensitivity
- + High resistance to extreme temperatures
- + No mechanical creepage
- + Modular system and choice of materials to suit individual applications



DIFFERENTIAL PRESSURE TRANSMITTER

TYPE 698

The pressure modules Type 698 are suitable for monitoring pressure and flow in air conditioning systems and in the laboratory sector. The module is optionally available with a 3 digit LED display, two limit value switches (potential free) as well as a square root extraction.

MEDIUM

Air and neutral gases

PRESSURE RANGE

-0.07 ... 0.07 / 0 ... 0.014 – 7.25 psi differential
-14.5 ... 0 / 0 ... 14.5 – 145 psi relative
-5 ... 5 / 0 ... 1 – 500 mbar differential
-1 ... 0 / 0 ... 1 – 10 bar relative

OUTPUT

0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA

ACCURACY

< 1.0% FS

ELECTRICAL CONNECTION

Screw terminals

PRESSURE CONNECTION

Hose connector conical 4 ... 7 mm or quick fitting

- + Rugged measured value detector
- + High overpressure safety margin, even in the lowest pressure range
- + Easy to install and commission
- + No maintenance required
- + High protection standard



DIFFERENTIAL PRESSURE TRANSMITTER

TYPE 699

The Type 699 transmitters are available in switchable pressure ranges and with or without digital device. The full-version includes customer specific adjustment possibilities. Especially developed sensors for each pressure range ensure accurate long-term stable measurement and the large variety of options provide the perfect platform for use in air conditioning technology as well as for fine measurement in the industrial and medical environment.

MEDIUM

Air and neutral gases

PRESSURE RANGE

0 ... 0.04 – 0.72 psi
0 ... 30 – 5000 Pa

OUTPUT

0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Screw terminals

PRESSURE CONNECTION

Hose connector Ø 6.2 mm

- + Available with or without LCD display or modbus
- + Switchable output signals
- + Switchable response curve (linear or root-extracted)
- + Resettable Zero Point (reset button)
- + Full scale adjustable



DIFFERENTIAL PRESSURE TRANSMITTER

TYPE 699M

The pressure transmitter 699M is used primarily for the monitoring of air and neutral gasses. The unit is optionally available with one or two differential pressure sensors, which allows the observation of differential pressure or volumetric flow at two individual points in the system. This makes the 699M ideally suited for a multitude of tasks in the HVAC industry. The 699M communicates via Modbus® RTU and features two universal inputs in addition to two analog outputs.



MEDIUM

Air and neutral gases

PRESSURE RANGE

0 ... 0.07 – 1.0 psi
0 ... 500 – 7000 Pa

OUTPUT

2x 0 ... 10 V, MODBUS

ACCURACY

< ± 0.5% FS

ELECTRICAL CONNECTION

4x cable bushing for cable

PRESSURE CONNECTION

Hose connector Ø 6.2 mm

- + High accuracy
- + Available with one or two differential pressure sensor units
- + Two universal inputs for 0 ... 10 V or Passive temperature elements
- + Two analog outputs 0–10 V freely configurable, scalable and controllable
- + Simple installation
- + Reduced wiring effort through decentralized node



PRESSURE LEVEL TRANSMITTER

TYPE 711

The level sensing pressure transmitters of Type 711 with a relative pressure measuring cell have an adjusted and amplified sensor signal. Cable length from 3 to 300 meters as well as Ex-versions and versions with drinking water approval are available.

MEDIUM

Fluides

PRESSURE RANGE

0 ... 1.45 – 232 psi
0 ... 0.1 – 10 bar

OUTPUT

4 ... 20 mA

ACCURACY

< 0.3% FS

ELECTRICAL CONNECTION

Cable in several lengths

- + Suitable for drinking water
- + Ex-version available
- + Sea water resistant
- + High accuracy
- + Large variety of cable length
- + Certified for shipbuilding with: Germanischer Lloyd | American Bureau of Shipping | Bureau Veritas Det Norske Veritas | Lloyd's Register



PRESSURE LEVEL TRANSMITTER

TYPE 712

The level sensing pressure transmitter Type 712 is manufactured using a relative or absolute pressure measuring cell with an adjusted and amplified sensor signal and is available with various cable lengths from 2 to 30 meters. The Type 712 offers Ex protection as well as versions with integrated temperature measurement. In addition to voltage and current outputs the Type 712 is available with ratiometric outputs.

MEDIUM

Fluides

PRESSURE RANGE

0 ... 4.35 – 36.25 psi relative
11.6 ... 20.3 – 43.5 psi absolute
0 ... 0.3 – 3 bar
0 ... 0.8 – 3 bar absolute

OUTPUT

0 ... 10 V, 4 ... 20 mA, ratiom. 10 ... 90%

ACCURACY

< 0.5% FS

ELECTRICAL CONNECTION

Cable in several lengths

- + Suitable for drinking water
- + Intrinsically safe execution with Voltage- and current output
- + With integrated temperature measurement
- + Suitable for fitting within a 1 inch diameter pipe



PRESSURE LEVEL TRANSMITTER

TYPE 713

The pressure level transmitter Type 713 is used for continuous fluid level measurement of ground and drinking water. The compact design allows the transmitter to be used in applications with restricted access as small as 3/4 inch i.d. pipe. As well as a current output the pressure level transmitter type 713 has been enhanced with energy efficient ratiometric and digital outputs making it ideal for battery powered applications.

MEDIUM

Fluides

PRESSURE RANGE

0 ... 8.7 – 23.2 psi relative
11.6 ... 20.3 – 87 psi absolute
0 ... 0.6 – 16 bar
0 ... 0.8 – 6 bar absolute

OUTPUT

4 ... 20 mA, ratiom. 10 ... 90%, 3000 ... 11000 Digits

ACCURACY

< 0.4% FS

ELECTRICAL CONNECTION

Cable in several lengths

- + Ceramic sensor Al₂O₃ 99.6%
- + Suitable for drinking water
- + Excellent linearity and long-term stability
- + Applicable in 3/4 inch pipes
- + Available with temperature measurement



ELECTRONIC PRESSURE SWITCH

TYP 521

The compact Type 521 pressure switch is based upon the Huba Control developed thick film technology where the pressure measuring cell is fully welded. Switching points set in the factory and are available both N/C and N/O function. Various electrical and pressure connections are available to suit given applications.

MEDIUM

Liquids and gases

PRESSURE RANGE

0 ... 29 – 8700 psi
0 ... 2.5 – 600 bar

UPPER SWITCHING POINT

8 ... 100% FS

LOWER SWITCHING POINT

5 ... 97% FS

ACCURACY

typ. < 0.3% FS

ELECTRICAL CONNECTION

Swift connector, M12x1

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction
- + Welded construction – no elastomer seals
- + Saving the customer time with the swift connector cable mounting system
- + Wide choice of connections available



ELECTRONIC PRESSURE SWITCH

TYPE 529

The compact Type 529 pressure switch is based on the ceramic technology developed by Huba Control and used in millions of applications over for decades. Switching points set in the factory and are available both N/C and N/O function. Various electrical and pressure connections are available to suit given applications.

MEDIUM

Liquids and gases

PRESSURE RANGE

-14.5 ... 0 / 0 ... 14.5 – 870 psi
-1 ... 0 – 60 bar

UPPER SWITCHING POINT

8 ... 100% FS

LOWER SWITCHING POINT

5 ... 97% FS

ACCURACY

typ. < 0.3% FS

ELECTRICAL CONNECTION

Swift connector, M12x1

PRESSURE CONNECTION

Inside thread or outside thread

- + Compact and rugged construction
- + Negligible temperature influence on accuracy
- + Saving the customer time with the swift connector cable mounting system
- + Wide choice of connections available



MECHANICAL PRESSURE SWITCH

TYPE 604

The Type 604 pressure switch is used as a Δp flow switch in ventilation ducts for the control of filters and fans, and in primary and secondary control systems for the control of air dampers. The 604 pressure monitoring switches are also ideally suited to protect heating coils from overheating and for monitoring industrial air cooling circuits.

MEDIUM

Air and neutral gases

PRESSURE RANGE

0.08 ... 1.2 – 20 inWC
0.2 ... 50 mbar

ELECTRICAL CONNECTION

Screw terminals, flat connector
6.3 or 4.8 mm

PRESSURE CONNECTION

Hose connector \varnothing 6.2 mm
or inside thread

- + Easy to install
- + Multi-layer gold plated contact
- + Combi-bracket for vertical or horizontal installation
- + Long-term stability of switching points through trapezoidal bead diaphragm
- + Cable strain relief integrated in PG11



OEM MECHANICAL PRESSURE SWITCH

TYPE 605

Type 605 pressure switches are specially developed for use in gas fired heating systems. There are more than 40 million switches in use worldwide. Produced on a fully automated production line. High setting accuracy and repeatability, combined with excellent reliability characterise a quality of switch above the industry norm.

MEDIUM

Air and neutral gases

PRESSURE RANGE

0.08 ... 1.6 inWC
20 ... 400 Pa

ELECTRICAL CONNECTION

Flat connector 6.3 or 4.8 mm

PRESSURE CONNECTION

Hose connector \varnothing 6.2 mm

- + Fitting of the switch
 - Fast mounting with snap bracket system
- + High contact strength (typically 10 cN) and self-cleaning roll operation contact
 - Not susceptible to contact pollution



MECHANICAL PRESSURE SWITCH

TYPE 620/625

Type 620 and 625 pressure switches, with 13 pressure ranges, are suitable for liquids and gases. Body materials are available in plastic, brass and aluminium, with a choice of NBR, FPM, EPDM and silicone diaphragms. Very high precision through finely tuned measurement stages and high long-term stability. Rugged design and especially suitable for use in general industrial equipment construction, process technology and food automation.

MEDIUM

Liquids and neutral gases

PRESSURE RANGE

-0.058 ... 13 / 0.029 ... 006 – 87 psi
-900 ... 6000 mbar

ELECTRICAL CONNECTION

Screw terminals, Flat connector 6.3 mm

PRESSURE CONNECTION

Inside thread M5, hose connector \varnothing 6 mm,
outside thread

- + High accuracy by 13 ideally designed pressure range increments
- + Switching differences adjustable
- + Customer specific switching points adjustable in factory
- + Rugged industrial switch with excellent Price / performance ratio



MECHANICAL PRESSURE SWITCH

TYPE 630

Differential pressure, vacuum and overpressure switches of Type 630 are suitable for monitoring neutral and slightly aggressive liquids and gases. Switching element isolated from medium. Ideal for use as flow monitor in sanitary piping / heating installations or for level monitoring in general process technology applications. Extremely rugged construction with high functionality due to 20 bar safety margin in both pressure chambers.

MEDIUM

Liquids and neutral gases

PRESSURE RANGE

0.087 ... 14.5 / 14.5 ... 43.5 – 79.8 psi
6 ... 5500 mbar

ELECTRICAL CONNECTION

Screw terminals, Flat connector 6.3 mm

PRESSURE CONNECTION

Inside thread

Mounting bracket

- + Repeatability up to ± 0.4 mbar
- + Functionally simple, rugged mechanics with high operating reliability
- + High overpressure safety margin at both connections (P1 + P2) up to 10/20 bar



OEM FLOW SENSOR

TYPE 200

The flow sensor Type 200 is based on the Karman Vortex principle. You can choose between various versions. The Type 200 is available with or without temperature measurement. With no moving parts the flow sensor is not sensitive to debris, has marginal pressure loss and high accuracy.

MEDIUM

Fluides

FLOW RANGE

0.132 ... 39.6 gal/min
0.5 ... 150 l/min

NOMINAL DIAMETERS

DN 6 / 8 / 10 / 15 / 20 / 25

OUTPUT

Frequency output 12 ... 483 Hz

TEMP. MEASUREMENT

NTC / PT1000

ELECTRICAL CONNECTION

Connector RAST 2.5, M12x1

TUBE CONNECTION

Plastic – connection copper tube
Plastic – outside thread

- + Low cost product with high levels of accuracy
- + Drinking water approval – WRAS, KTW, W270, ACS
- + Wide application temperature range
- + Measuring element not sensitive to debris



FLOW SENSOR TYPE 210

The flow sensor Type 210 is based on the Karman Vortex principle. In comparison to the OEM flow sensor (Type 200), the Type 210 is available with an increased range of power supply and output signals all with and without temperature measurement. With no moving parts the flow sensor is not sensitive to debris, has marginal pressure loss and high accuracy.

MEDIUM
Fluides

FLOW RANGE

0.132 ... 39.6 gal/min
0.5 ... 150 l/min

NOMINAL DIAMETERS

DN 6 / 8 / 10 / 15 / 20 / 25

OUTPUT

Frequency output 12 ... 483 Hz
Analogue signal 0 ... 10 V, 4 ... 20 mA

TEMP. MEASUREMENT

PT1000

ELECTRICAL CONNECTION

Connector M12x

TUBE CONNECTION

Plastic – connection copper tube
Plastic – outside thread

- + Flow measuring with voltage, current, pulse or frequency output
- + Temperature non-sensitive measuring principle
- + Drinking water approval – WRAS, KTW, W270, ACS
- + Measuring element not sensitive to debris



FLOW SENSOR TYPE 230

The flow sensor Type 230 is based on the Karman Vortex principle. You can choose between various versions as integrated temperature measurement. The Type 230 has a rugged construction of red brass. With no moving parts the flow sensor is not sensitive to debris, has marginal pressure loss and high accuracy.

MEDIUM
Fluides

FLOW RANGE

0.475 ... 39.6 gal/min
1.8 ... 150 l/min

NOMINAL DIAMETERS

DN 10 / 15 / 20 / 25

OUTPUT

Frequency output 13 ... 480 Hz
Analogue signal 0 ... 10 V, 4 ... 20 mA

TEMP. MEASUREMENT

PT1000

ELECTRICAL CONNECTION

Connector M12x1

TUBE CONNECTION

Red brass – outside thread

- + Flow measuring with voltage, current, pulse or frequency output
- + Temperature non-sensitive measuring principle
- + Drinking water approval – WRAS, KTW, W270, ACS
- + Wide application temperature range
- + Measuring element not sensitive to debris



FLOW SENSOR TYPE 235

The flow sensor Type 235 is based on the Type 200 but incorporates a brass housing. The flow sensor Type 235 is based on the Karman Vortex principle. You can choose between various versions as integrated temperature measurement. With no moving parts the flow sensor is not sensitive to debris, has marginal pressure loss and high accuracy.

MEDIUM
Fluides

FLOW RANGE

0.238 ... 63.4 gal/min
0.9 ... 240 l/min

NOMINAL DIAMETERS

DN 8 / 10 / 15 / 20 / 25 / 32

OUTPUT

Frequency output 9 ... 479 Hz

TEMP. MEASUREMENT

NTC / PT1000

ELECTRICAL CONNECTION

Connector RAST 2.5, M12x1

TUBE CONNECTION

Brass – outside thread

- + Low-cost product with high levels of accuracy
- + Temperature non-sensitive measuring principle
- + Drinking water approval – WRAS, ACS
- + Wide application temperature range
- + Measuring element not sensitive to debris



FLOW SENSOR TYPE 236

The flow sensor Type 236 is based on the Type 210 but incorporates a brass housing. The Vortex Sensor Type 236 has a rugged construction of brass connection. This flow sensor is available with a larger variety concerning power supply and outputs. You can choose between various versions as integrated temperature measurement. With no moving parts the flow sensor is not sensitive to debris, has marginal pressure loss and high accuracy.

MEDIUM
Fluides

FLOW RANGE

0.238 ... 63.4 gal/min
0.9 ... 240 l/min

NOMINAL DIAMETERS

DN 8 / 10 / 15 / 20 / 25 / 32

OUTPUT

Frequency output 9 ... 479 Hz
Analogue signal 0 ... 10 V, 4 ... 20 mA

TEMP. MEASUREMENT

PT1000

ELECTRICAL CONNECTION

Connector M12x1

TUBE CONNECTION

Brass – outside thread

- + Flow measuring with voltage, current, pulse or frequency output
- + Temperature non-sensitive measuring principle
- + Drinking water approval – WRAS, ACS
- + Measuring element not sensitive to debris



FLOW SENSOR TYPE 240

The flow sensor Type 240 is based on the VORTEX principle and provides reliable measurement results of liquids. It operates without moving parts, which ensures a long service life and high accuracy. Thanks to its robust construction, it is insensitive to contamination and can also be used at high pressures or temperatures. At the same time, it has very good accuracy.

MEDIUM
Fluides

FLOW RANGE

0.132 ... 39.6 gal/min
0.5 ... 150 l/min

NOMINAL DIAMETERS

DN 6 / 8 / 10 / 15 / 20 / 25

OUTPUT

Analogue signal 4 ... 20 mA

TEMP. MEASUREMENT

PT1000

ELECTRICAL CONNECTION

Connector M12x1

TUBE CONNECTION

Plastic – connection copper tube
Plastic – outside thread

- + Excellent tightness rate
- + Very robust and reliable
- + Up to 100 bar (high pressure shock wave)
- + Media temperature measurement
- + Excellent media resistance
- + Drinking water approval
- + UL 61010-1
- + High operating pressure range



CANTILEVERED CERAMIC BEAM- TECHNOLOGY FROM HUBA CONTROL

The excellent synergy of our unique diaphragm in combination with our ceramic cantilever beam sensors allow us to produce transmitters with long-term stability for very fine measurement in the Pascal range. This technology has been proven on millions of sensors in many different applications.



PRESSURE MEASURING CELL- TECHNOLOGY FROM HUBA CONTROL

The in-house development and production of pressure measuring cells in combination with the excellent electronic design allows the production of innovative pressure transmitters. Huba Control draws on over 20 years of experience in the use of ceramic technology.

The products are proven millionfold in various applications.

Huba Control AG

Industriestrasse 17
5436 Würenlos, Svizzera
Tel. +41 56 436 82 00
info.ch@hubacontrol.com

Huba Control USA, Inc.

303 Wyman Street, Suite #300
Waltham MA 02451, USA
Tel. +1 866-6HUBACO
info.usa@hubacontrol.com



Consultancy in your area
hubacontrol.com/en/worldwide

